




sezione e quote

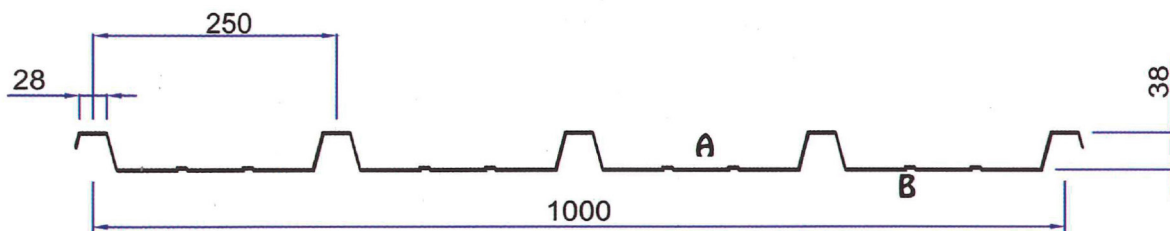

specifiche tecniche

| S/T/E mm | Kg/m ² | J cm ⁴ /m | W cm ³ /m |
|-------------|-------------------|-------------------------|-------------------------|
| 0,6 | 5,89 | 15,2 | 5,31 |
| 0,7 | 6,87 | 17,9 | 6,26 |
| 0,8 | 7,85 | 20,5 | 7,17 |
| 1,0 | 9,81 | 25,5 | 8,91 |

Carico Massimo Distribuito, espresso in Kg/mq con Freccia $\leq 1/200L$

| | L (mt) | | | | | | | | | | | | |
|--|--------|------|------|------|------|------|------|------|------|------|------|------|------|
| | 1,00 | 1,30 | 1,50 | 1,80 | 2,00 | 2,30 | 2,50 | 2,80 | 3,00 | 3,30 | 3,50 | 3,80 | 4,00 |
| | 520 | 330 | 230 | 170 | 125 | 90 | 65 | | | | | | |
| | 520 | 330 | 230 | 170 | 125 | 100 | 80 | 60 | 50 | | | | |
| | 650 | 415 | 285 | 210 | 160 | 125 | 100 | 80 | 60 | | | | |
| | 610 | 390 | 270 | 195 | 150 | 105 | 75 | 55 | | | | | |
| | 610 | 390 | 270 | 195 | 150 | 115 | 90 | 75 | 60 | | | | |
| | 765 | 490 | 335 | 245 | 185 | 145 | 115 | 95 | 70 | 55 | | | |
| | 700 | 445 | 305 | 225 | 170 | 120 | 85 | 60 | | | | | |
| | 700 | 445 | 305 | 225 | 170 | 130 | 105 | 85 | 70 | | | | |
| | 875 | 560 | 385 | 280 | 215 | 165 | 135 | 110 | 80 | 65 | 50 | | |
| | 880 | 560 | 385 | 280 | 210 | 150 | 110 | 80 | 90 | 75 | 65 | 55 | |
| | 880 | 560 | 385 | 280 | 210 | 165 | 130 | 110 | 90 | 75 | 60 | | |
| | 880 | 560 | 385 | 280 | 210 | 165 | 130 | 110 | 90 | 75 | 60 | | |
| | 1100 | 700 | 485 | 350 | 270 | 210 | 170 | 135 | 100 | 80 | 60 | | |
| | | | | | | | | | 110 | 95 | 80 | 70 | |

senza limitazioni di freccia